


1		A		B		C		D		E		F	
REV.		DESCRIPTION						APPROVED BY		DATE		ECN NO.	
A		RELEASE						KUNG					
B													
C													

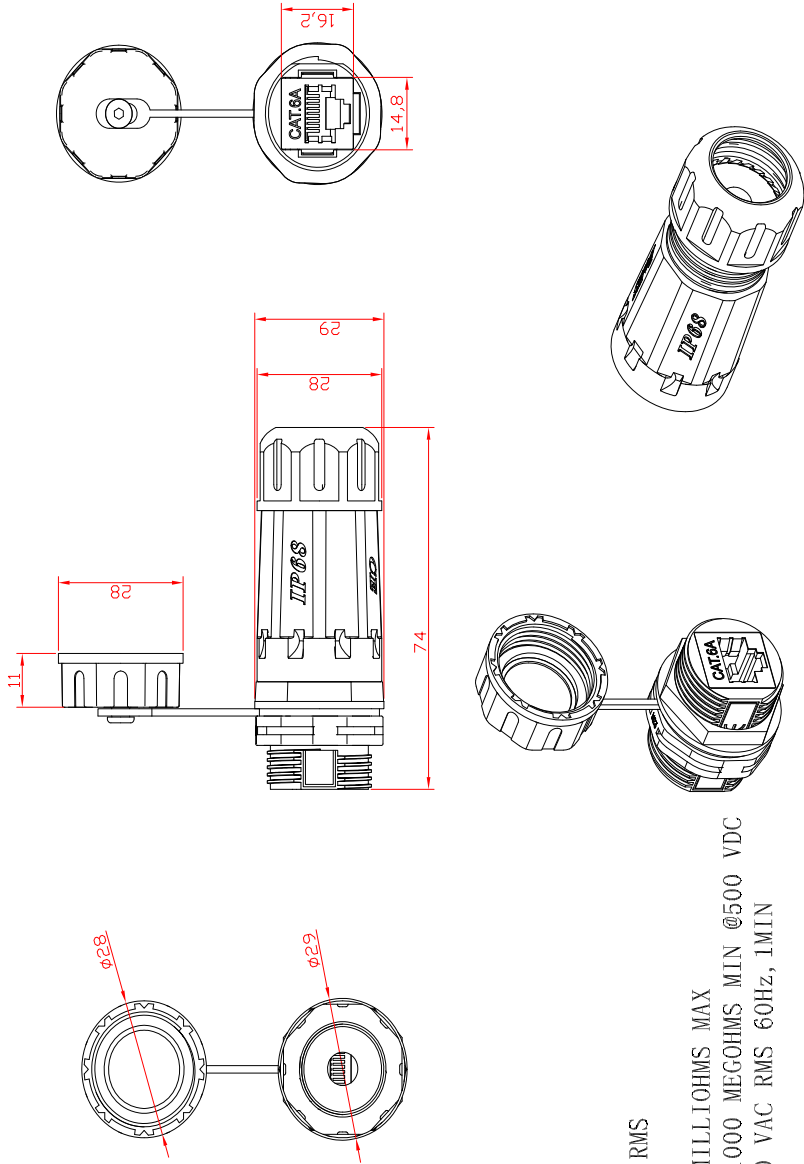

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40° TO +85°
2. OPERATION: -20° TO +68°

MECHANICAL:

1. HOUSING MATERIAL: PA66
2. INSERT MATERIAL: FAME RETARDANCY PBT
3. PCB MATERIAL: FR-4 T=1.6mm
4. RJ45 JACK CONTACT: PHOSPHOR BRONZE WITH NICKEL PATING GOLD PLATED (3U/6U/15U/30U/50U)
5. RJ45 JACK LIFE: 750 TIMES MIN
6. Waterproof grade: IP68

DRAWN	Ku Chau	APP'D	KUNG	UNIT	mm	TOLERANCE							JKL TECHNOLOGY CO., LTD.	TITLE	Cat.6A RJ45 inline Coupler Waterproof Connector	SHEET	
	CHK'D					Emly Suen	SCALE	1:1	0>1.0	±0.1							