




A		B		C		D		E		F	
REV.		DESCRIPTION		APPROVED BY		DATE		ECN NO.			
A		RELEASE		KUNG		2025.06.05					
B											
C											

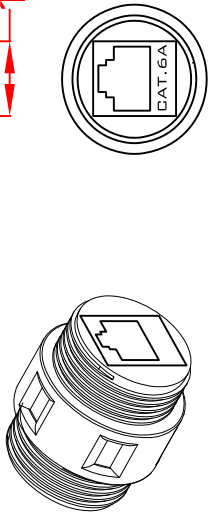

* SUBJECT TO CHANGE WITHOUT NOTICE

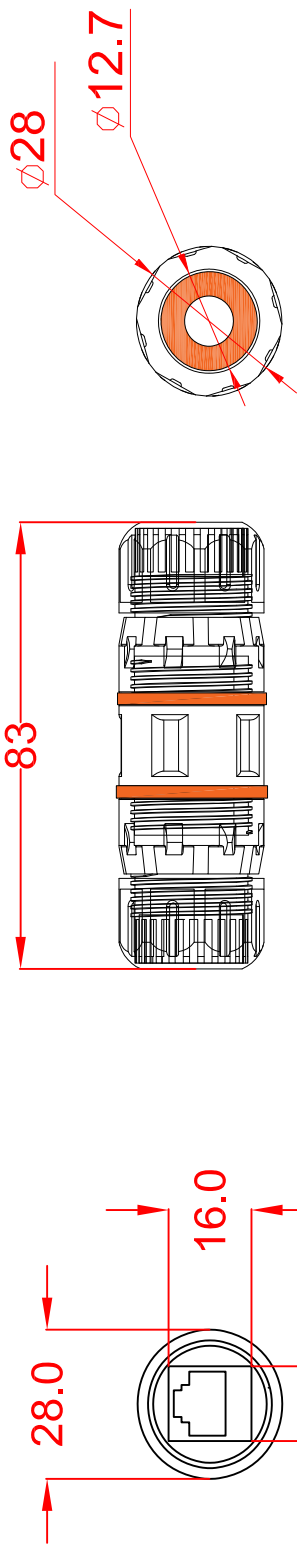

- NOTES:
- ELECTRICAL:
- 1. VOLTAGE RATING: 125 VAC RMS
 - 2. CURRENT RATING: 1.5AMP
 - 3. CONTACT RESISTANCE: 100MILLIOHMS MAX
 - 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
 - 5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN
- ENVIRONMENTAL:
- 1. STORAGE: -40° TO +85°
 - 2. OPERATION: 0° TO 70°
- MECHANICAL:
- 1. THE SHELL MATERIAL: ZINC ALLOY
 - 2. HOUSINGG MATERIAL: PC
 - 3. INSERT MATERIAL: FAME RETARDANCY PBT
 - 4. PCB MATERIAL: FR-4 T=1.6mm
 - 5. CONTACT MATERIAL: PHOSPHOR BRONZE STAMP PIN T=0.30mm
 - 6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE T=0.50mm WITH TIN PLATING
 - 7. IDC LIFE: 200 FTIMES MIN
 - 8. WIRE: AWG 22-26



DRAWN	Ku Chau		APP'D	KUNG	UNIT	mm	TOLERANCE			JKL TECHNOLOGY CO., LTD.		TITLE		SHEET 
	CHK'D	Emly Suen					PART NO.	DWG NO.				Cat.6A STP Waterproof Inline Coupler, short type	VERSION A	
							0>1.0 1.0>6.0 6.0>12.0 12.0>25.0 25.0>	±0.1 ±0.2 ±0.3 ±0.4 ±0.5					RJ45S-C6A-AP65	AP65-S6A

JKL TECHNOLOGY CO., LTD.

