






REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	2025.05.01	
B				
C				

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	2025.05.01	
B				
C				

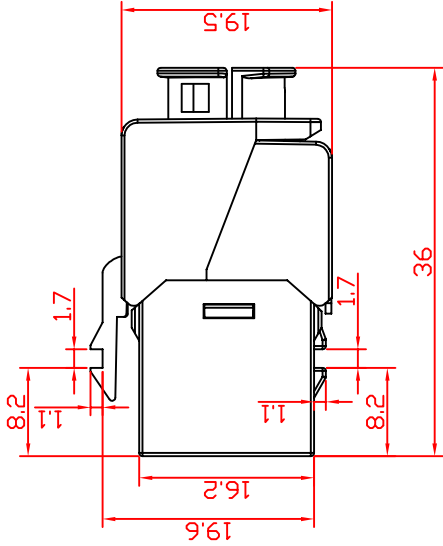

* SUBJECT TO CHANGE WITHOUT NOTICE

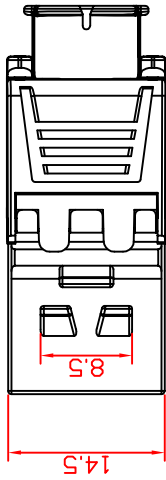

NOTES:

- ELECTRICAL:
- 1.VOLTAGE RATING:125 VAC RMS
 - 2.CURRENT RATING:1.5AMP
 - 3.CONTACT RESISTANCE:100MILLIOHMS MAX
 - 4.INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
 - 5.DIELECTRIC STRENGTH:750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

- 1.STORAGE:-40°TO +85°
- 2.OPERATION:0°TO 70°

MECHANICAL:

- 1.THE SHELL MATERIAL:ZINC ALLOY
- 2.HOUSING MATERIAL:PC
- 3.PCB MATERIAL:FR-4 T=1.6mm
- 4.INSERT MATERIAL:PC
- 5.CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN 0.35mm
- 6.IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.40mm WITH TIN PLATING
- 7.RJ45 JACK LIFE:750 FTIMES MIN
- 8.IDC LIFE:200 TIMES MIN
- 9.WIRE:AWG 22-26

DRAWN	Ku Chau	APP'D		KUNG		UNIT	MM	TOLERANCE	Ø>1.0 ±0.1 1.0>6.0 ±0.2 6.0>12.0 ±0.3 12.0>25.0 ±0.4 25.0> ±0.5		JKL TECHNOLOGY CO., LTD.	TITLE PART NO.	CAT.6A Tool free Keystone Jack Shield Type RJ-S06A-AP044	DWG NO. KJ-AP044-S6A	SHEET VERSION	A
-------	---------	-------	--	------	--	------	----	-----------	--	--	-------------------------------------	--------------------------------------	--	--	-------------------------------------	--------------------------