


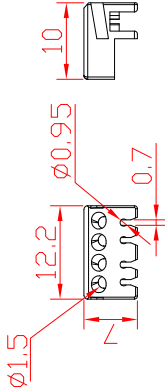
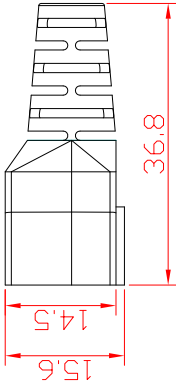

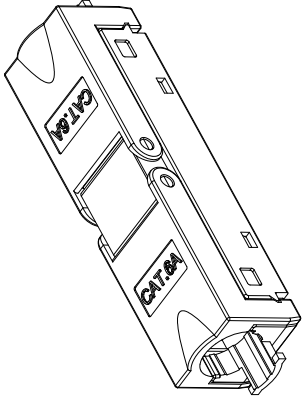


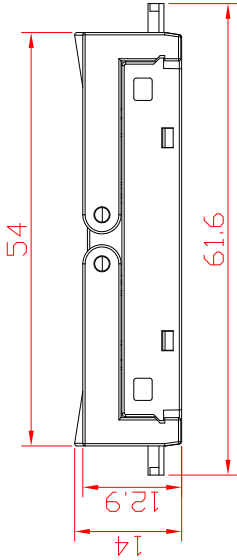


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG		
B				
C				

* SUBJECT TO CHANGE WITHOUT NOTICE



NOTES:

ELECTRICAL:

- VOLTAGE RATING:125 VAC RMS
- CURRENT RATING:1.5AMP
- CONTACT RESISTANCE:100MILLIOHMS MAX
- INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
- DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

- STORAGE:-40°TO +85°
- OPERATION:0°TO 70°

MECHANICAL:

- THE SHELL MATEERIAL:ZINC ALLOY
- HOUSING MATERIAL:PC
- PCB MATERIAL:FR-4 T=1.6mm
- CONTACT MATERIAL:PHOSPHOR BRONZE
- IDC LIFE:200 TIMES MIN
- WIRE:AWG 23-26

DRAWN	Ku Chou	APP'D	KUNG	UNIT	MM	TOLERANCE	JKL TECHNOLOGY CO., LTD.	TITLE	STP Cat.6A coupler Toolless type	SHEET
CHK'D	Enly Suen			SCALE	1d	0>1.0 ±0.1 1.0>6.0 ±0.2 6.0>12.0 ±0.3 12.0>25.0 ±0.4 25.0> ±0.5		PART NO.	RJ-S06A-AP056	VERSION
								DWG NO.	AP056-S6A	A