



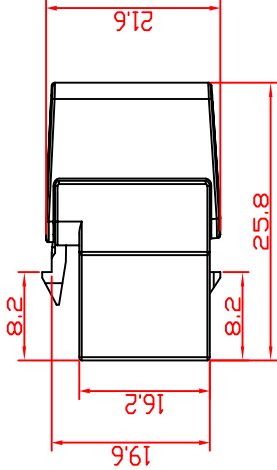


A		B		C		D		E		F	
REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.							
A	RELEASE	KUNG									
B											
C											



NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40 ° TO +85 °
2. OPERATION: 0 ° TO 70 °

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL: PC
3. PCB MATERIAL: FR-4 T=1.2mm
4. INSERT MATERIAL: PC
5. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.35mm
6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
7. RJ45 JACK LIFE: 750 FTIMES MIN
8. IDC LIFE: 200 TIMES MIN
9. WIRE: AWG 22-26

DRAWN	Ku Chau	APP'D		KUNG		UNIT	mm	TOLERANCE	 	JKL TECHNOLOGY CO., LTD.			TITLE	Cat.6A Keystone Jack Toolless Shielded Type <th>SHEET</th> <td></td>		SHEET	
CHK'D	Emly Suen					SCALE	1:1	0>1.0 ±0.1 1.0>6.0 ±0.2 6.0>12.0 ±0.3 12.0>25.0 ±0.4 25.0> ±0.5				PART NO.	RJ-S06A-AP075A	DWG NO.	AP075A	VERSION	A