


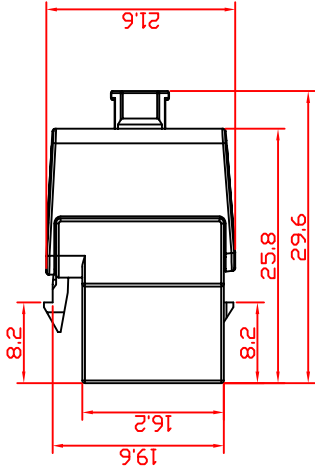



A		B		C		D		E		F	
REV.	DESCRIPTION	APPROVED BY		DATE		ECN NO.					
A	RELEASE	KUNG									
B											
C											



- NOTES:
- ELECTRICAL:
1. VOLTAGE RATING: 125 VAC RMS
 2. CURRENT RATING: 1.5AMP
 3. CONTACT RESISTANCE: 100MILLIOHMS MAX
 4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
 5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

- ENVIRONMENTAL:
1. STORAGE: -40 °TO +85 °
 2. OPERATION: 0 °TO 70 °

- MECHANICAL:
1. THE SHELL MATERIAL: ZINC ALLOY
 2. HOUSING MATERIAL: PC
 3. PCB MATERIAL: FR-4 T=1.2mm
 4. INSERT MATERIAL: PC
 5. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.35mm
 6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
 7. RJ45 JACK LIFE: 750 FTIMES MIN
 8. IDC LIFE: 200 TIMES MIN
 9. WIRE: AWG 22-26

DRAWN	Ku Chau	APP'D	KUNG	UNIT	mm	TOLERANCE						JKL TECHNOLOGY CO., LTD.		TITLE	Cat.6A Keystone Jack Toolless Shielded Type		SHEET
						10	10	10	10					PART NO.	DWG NO.	VERSION	
CHK'D	Emily Suen			SCALE										AP075B	AP075B	A	A