

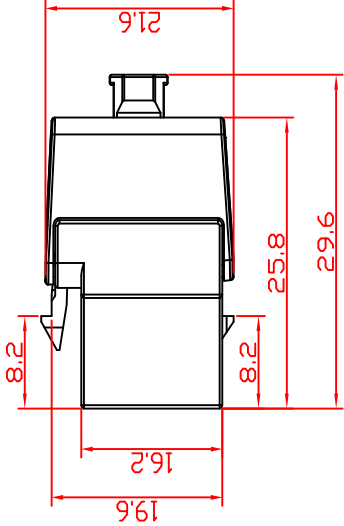


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG		
B				
C				



NOTES:



- ELECTRICAL:**
- 1.VOLTAGE RATING:125 VAC RMS
 - 2.CURRENT RATING:1.5AMP
 - 3.CONTACT RESISTANCE:100MILLIOHMS MAX
 - 4.INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
 - 5.DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

- 1.STORAGE:-40°TO +85°
- 2.OPERATION:0°TO 70°

MECHANICAL:

- 1.THE SHELL MATERIAL:ZINC ALLOY
- 2.HOUSING MATERIAL:PC
- 3.PCB MATERIAL:FR-4 T=1.2mm
- 4.INSERT MATERIAL:PC
- 5.CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN 0.35mm
- 6.IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
- 7.RJ45 JACK LIFE:750 FTIMES MIN
- 8.IDC LIFE:200 TIMES MIN
- 9.WIRE:AWG 22-26



DRAWN	Ku Chau	APP'D	KUNG	UNIT	mm	TOLERANCE			JKL TECHNOLOGY CO., LTD.			TITLE	Cat.6A Shielded Toolless with Shutter	SHEET	⊕
CHK'D	Emilly Suen			SCALE	1:1				PART NO.	RJ-S06A-AP076B	DWG NO.	AP076B-S6A	VERSION	A	