


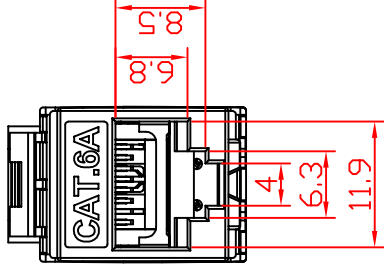



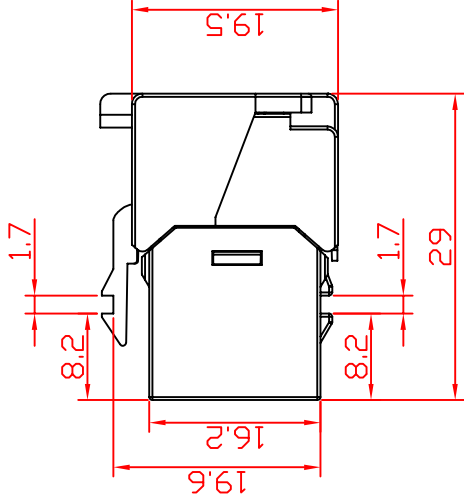

* SUBJECT TO CHANGE WITHOUT NOTICE

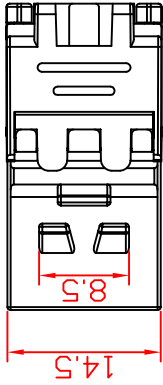

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100 MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40 ° TO +85 °
2. OPERATION: 0 ° TO 70 °

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL: PC
3. PCB MATERIAL: FR-4 T=1.6mm
4. INSERT MATERIAL: PC
5. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.35mm
6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.40mm WITH TIN PLATING
7. RJ45 JACK LIFE: 750 FTIMES MIN
8. IDC LIFE: 200 TIMES MIN
9. WIRE: AWG 22-26

REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	KUNG	2025.06.05	
B				
C				

DRAWN	Ku Chau	APP'D	KUNG	UNIT	mm	TOLERANCE			JKL TECHNOLOGY CO., LTD.				TITLE	Cat.6A STP Keystone Jack Toolless Type			SHEET
	CHK'D												Emily Suen	PART NO.	RJ-S06A-AP087A	DWG NO.	AP087A