


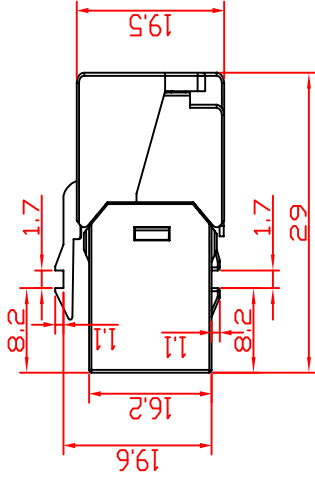



A		B		C		D		E		F	
REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.							
A	RELEASE	KUNG									
B											
C											



NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40 °TO +85 °
2. OPERATION: 0 °TO 70 °

MECHANICAL:

1. THE SHELL MATERIAL: ZINC ALLOY
2. HOUSING MATERIAL: PC
3. PCB MATERIAL: FR-4 T=1.6mm
4. INSERT MATERIAL: PC
5. CONTACT MATERIAL: PHOSPHOR BRONZE
STAMP PIN 0.35mm
6. IDC CONTACT MATERIAL: PHOSPHOR BRONZE
T=0.40mm WITH TIN PLATING
7. RJ45 JACK LIFE: 750 FTIMES MIN
8. IDC LIFE: 200 TIMES MIN
9. WIRE: AWG 22-26

DRAWN	Ku Chau	APP'D	KUNG	UNIT	mm	TOLERANCE	mm	SCALE	1:1	UNIT	mm	TOLERANCE	mm	SCALE	1:1	TITLE	PART NO.	DWG NO.	VERSION	SHEET
CHK'D	Enly Suen																			
																JKL TECHNOLOGY CO., LTD.	RJ-S06A-AP087B	AP087B-S6A	A	1
																Cat 6A Shielded Slim(14.5mm) and Short(29mm) Keystone Jack with Shutter, toolless type				