






* SUBJECT TO CHANGE WITHOUT NOTICE

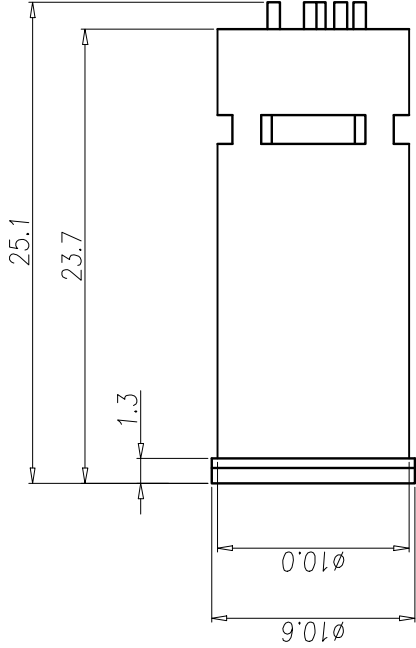

ASS'y



NUT

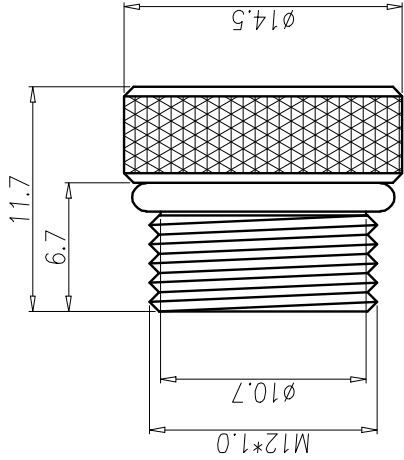

1. MATERIAL :
- 1-1. HOUSING : PBT UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM
2. FINISH :
- 2-1. CONTACT : GOLD FLASH.
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : BRIGHT TIN PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 2A
 - 3-2. Rated voltage : 30V
 - 3-3. Water proof : IP67
4. Environmental :
- 4-1. Operation Temperature : -40℃~105℃

REV.	DESCRIPTION	APPLY. BY	DATE	ECN NO.
A	RELEASE	KUNG	07/08/25'	
B				
C				

DRAW	HULK	APPVL	KUNG	UNIT	mm	TOLERANCE	xx .xx .xxx .xxxx ANGULA	±0.20 ±0.10 ±0.05 ±0.03 ±1°		JKL TECHNOLOGY CO., LTD.	TITLE	M12 8P (M) SHIELDED MOLDING TYPE.	SHEET	1
CHECK				SCALE	1:1						PART NO.	N-25174-1	VERSION	A
											DWG NO.			