

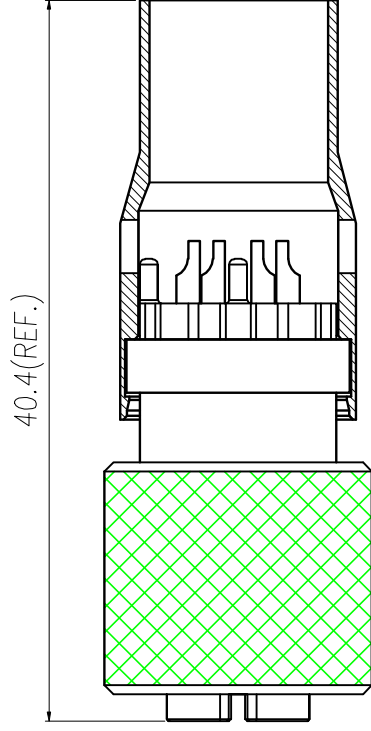



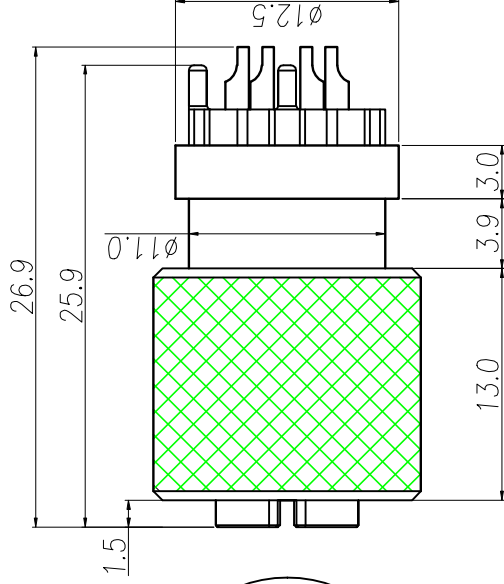


* SUBJECT TO CHANGE WITHOUT NOTICE

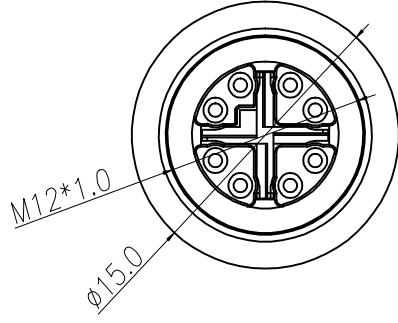

ASS'Y

1. MATERIAL :
- 1-1. HOUSING : PA66 UL94V-0 ; COLOR : BLACK
 - 1-2. CONTACT : BRASS
 - 1-3. NUT : BRASS
 - 1-4. SHELL : BRASS
 - 1-5. O-RING : EPDM
 - 1-6. X-SHELL : Zn ALLOY
 - 1-7. BACK SHELL : BRASS
2. FINISH :
- 2-1. CONTACT : 10 MICRO INCHES MIN. GOLD PLATED
 - 2-2. NUT : NICKEL PLATED
 - 2-3. SHELL : NICKEL PLATED
 - 2-4. X-SHELL : NICKEL PLATED
 - 2-5. BACK SHELL : NICKEL PLATED
3. ELECTRICAL SPECIFICATION :
- 3-1. Rated current : 0.5A
 - 3-2. Rated voltage : 48V
 - 3-3. Water proof : IP67
 - 3-4. Withstanding voltage : 1.5 kV AC / 3 mA (60 seconds)
 - 3-5. Contact resistance : <15 mohms
 - 3-6. Insulation resistance : >100 Mohms
4. Environmental :
- 4-1. Operation Temperature : -20°C~85°C

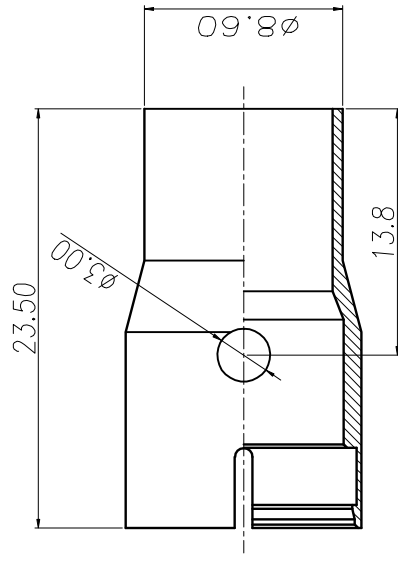

BACK SHELL

DRAWN	Ku Chou	APP'D	KUNG	UNIT	mm	TOLERANCE			JKL TECHNOLOGY CO., LTD.		TITLE	M12 8P (F) X-CODE SHIELDED FOR CABLE (BACK SHELL)	SHEET
											PART NO.		
CHK'D	Emly Suen			SCALE	1:1	.x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°			QC9667		DWG NO.	VERSION	A